




COMPOSITE LIGHTNING PROTECTION MAST is a perfect solution for everyone, who wants to protect an equipment against lighting discharge.

The installation of the lightning conductor which is put inside the composite mast is an additional protection for people and equipment located near the construction.

On the top of the mast there is a lightning copper-antenna of height 50 cm, which is installed inside. The ground wire does not touch walls of the mast.

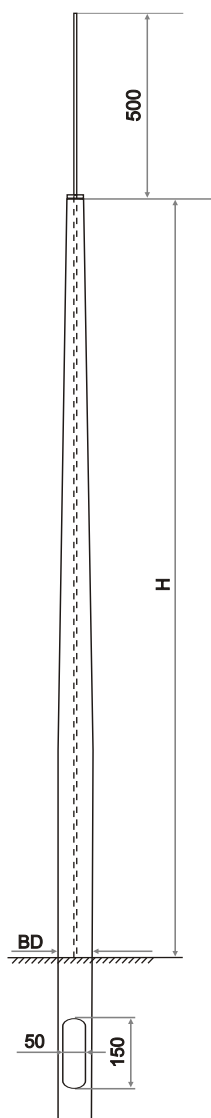

All masts from 13-22 m are made of two elements

Symbol of the mast	H [m]	BD [mm]
SKPW-OD 5,0/120/65	5,0	120
SKPW-OD 6,0/120/65	6,0	120
SKPW-OD 7,0/120/65	7,0	120
SKPW-OD 8,0/120/65	8,0	120
SKPW-OD 9,0/120/65	9,0	120
SKPW-OD 10,0/140/65	10,0	140
SKPW-OD 11,0/140/65	11,0	140
SKPW-OD 12,0/140/65	12,0	140
SKPW-OD 13,0/175/65	13,0	175
SKPW-OD 14,0/175/65	14,0	175
SKPW-OD 15,0/175/65	15,0	175
SKPW-OD 16,0/175/65	16,0	175
SKPW-OD 17,0/175/65	17,0	175
SKPW-OD 18,0/175/65	18,0	175
SKPW-OD 19,0/200/65	19,0	200
SKPW-OD 20,0/200/65	20,0	200



MAST MOUNTED IN THE GROUND

symbols used in the table

H [m] – height
BD [mm] – bottom diameter

THIS DATA SHEET DOES NOT CONSTITUTE AN OFFER